

Sub A1

100 parts by weight of a thermoplastic polyamide resin  
(A),

and


2. A flame retardant resin composition according to claim 1, wherein the phosphazene compound (C) comprises at least one compound selected from the group consisting of:

$$\left[ \begin{array}{c} \text{O}-\text{Ph} \\ | \\ \text{P}=\text{N} \\ | \\ \text{O}-\text{Ph} \end{array} \right]_m$$

116  
PM W.

wherein m is an integer of 3 to 25 and Ph is phenyl;

chain phenoxy phosphazenes represented by the general formula (II):

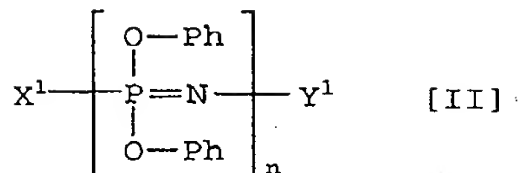


wherein  $X^1$  is  $-N=P(OPh)_3$  or  $-N=P(O)OPh$ ,  $Y^1$  is  $-P(OPh)_4$  or  $-P(O)OPh_2$ ,  $n$  is an integer of 3 to 10,000, and Ph is phenyl; and

cross-linked phenoxy phosphazene compounds obtained by cross-linking at least one phenoxy phosphazene selected from the group consisting of those represented by the above general formulae [I] and [II] through a cross-linking group.

3. A flame retardant resin composition according to claim 2, wherein the cross-linking group is phenylene or bisphenylene.

4. A flame retardant resin composition according to claim 2, wherein the cross-linking group is at least one group selected from the group consisting of o-phenylene, m-phenylene, p-phenylene, and bisphenylenes represented by the general formula [III]:



wherein A is  $-C(CH_3)_2-$ ,  $-SO_2-$ ,  $-S-$  or  $-O-$ ; and q is 0 or 1.

5. A flame retardant resin composition according to claim 2, wherein said cross-linked phenoxy phosphazene compound

09870716-0530001

comprises a cross-linking group which is present between two oxygen atoms of the phenoxy phosphazenes from which phenyl groups are eliminated; contains phenylene groups derived from those represented by the general formula [III] in an amount of 50 to 99.9 mol% based on the total number of phenyl groups and phenylene groups contained in the cyclic phenoxy phosphazene represented by the general formula [I], the chain phenoxy phosphazene represented by the general formula [II] or mixture thereof; and has no free hydroxy group in a molecule of the phosphazene compound (C).

6. A flame retardant resin composition according to claim 1, wherein the polyamide resin (A) is polyamide 6.

7. A flame retardant resin composition according to claim 1, further comprising an inorganic filler (D1).

8. A flame retardant resin composition according to claim 7, wherein the inorganic filler (D1) is a glass fiber.

9. A flame retardant resin composition according to claim 7, wherein the content of the inorganic filler (D1) is 5 to 300 parts by weight based on 100 parts of the polyamide resin (A).

10. A flame retardant resin composition according to claim 1, further comprising a magnetic powder (D2).

09870716-053001  
T00850-912860

11. A flame retardant resin composition according to claim 10, wherein the content of the magnetic powder (D2) is 50 to 95% by weight based on the weight of the flame retardant resin composition, and the content of the phosphazene compound (C) is 0.1 to 40% by weight based on the weight of the flame retardant resin composition.

12. A flame retardant resin composition according to claim 10, wherein the magnetic powder (D2) is ferrite-based magnetic powder, alnico-based magnetic powder or mixture thereof.

13. A flame retardant resin magnet comprising the flame retardant resin composition according to claim 10.

Added B1

09870715 053004  
FO0250 917/0/860